



Contact Rubber

# CLEAT TECHNOLOGY



Flat and custom profiled puller cleats / blocks / pads are one of our areas of expertise and are suited to all puller manufacturers.

**Contact Rubber** has mastered the techniques required to produce high quality products. From mold design to production runs, we have the necessary know-how to handle your projects.

## TECHNICAL DATA

MATERIAL	TENSILE STRENGTH (ASTM D412)	COMPRESSION SET (ASTM D395B)	HARDNESS (ASTM D22401)	COLOR
EPDM	1500	40	50-55	WHITE
EPDM	1500	50	60-65	ORANGE
NR/SBR	2000	40	70-75	GREY
NR/SBR	2200	35	80-85	RED

## CLEAT FEATURES:

- Grooved or contoured as per customer specifications
- Available in several hardnesses and colors
- Superior non-marking compound
- Engineering support
- Extensive inventory
- Quick-turn around
- Complete chain assemblies
- Dry lube application




**Contact Rubber**

2227, 46<sup>th</sup> Ave., Lachine, Québec, Canada H8T 3C9  
T.: +1.514. 631-0234 E.: info@ctcrubber.com


[ctcrubber.com](http://ctcrubber.com)

**TYPES OF CLEATS:**


*Standard Pipe Cleats:*

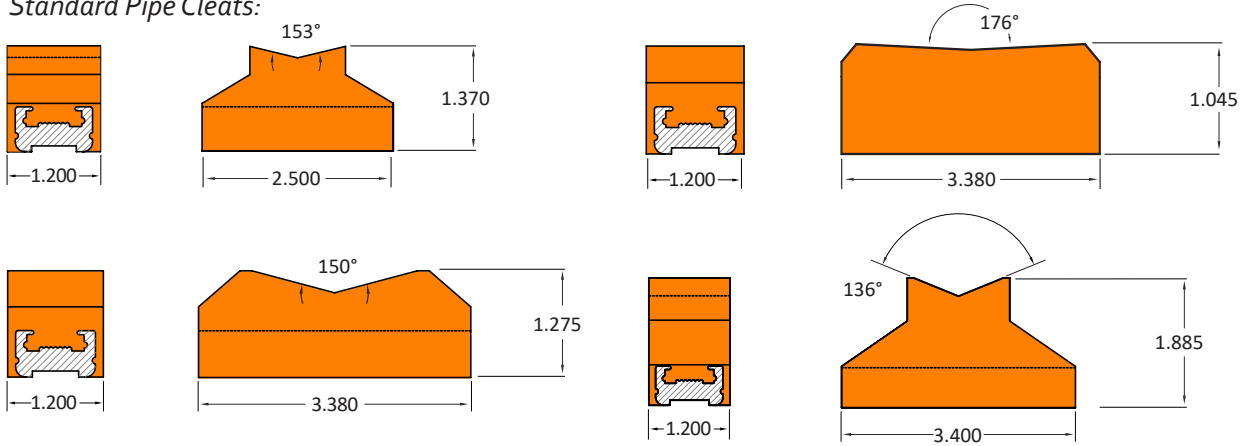


*Fixed Cleats:*

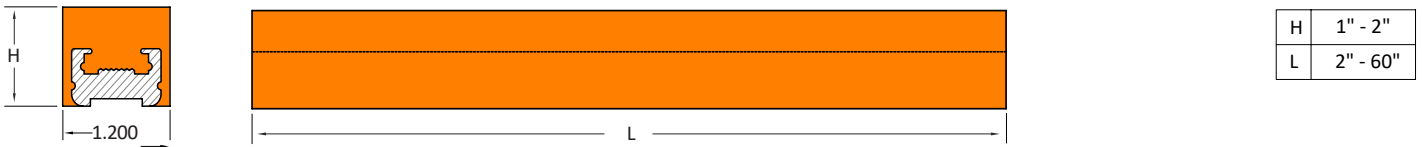

*New Fixed Cleats:*

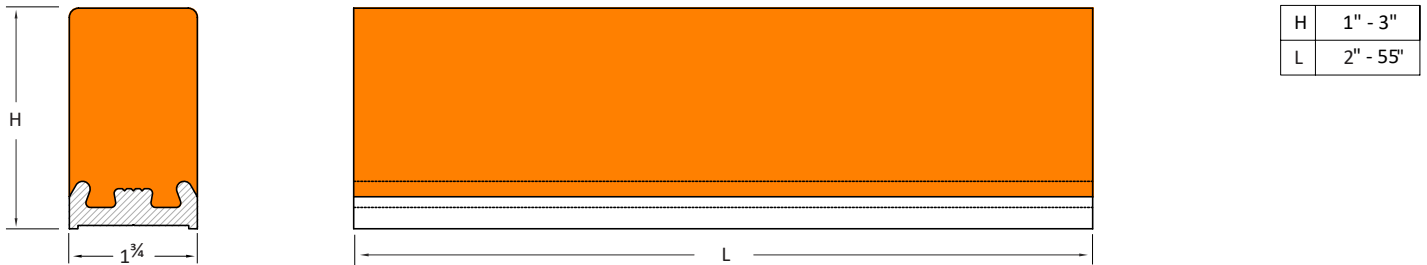

*Quick-Change Cleats:*

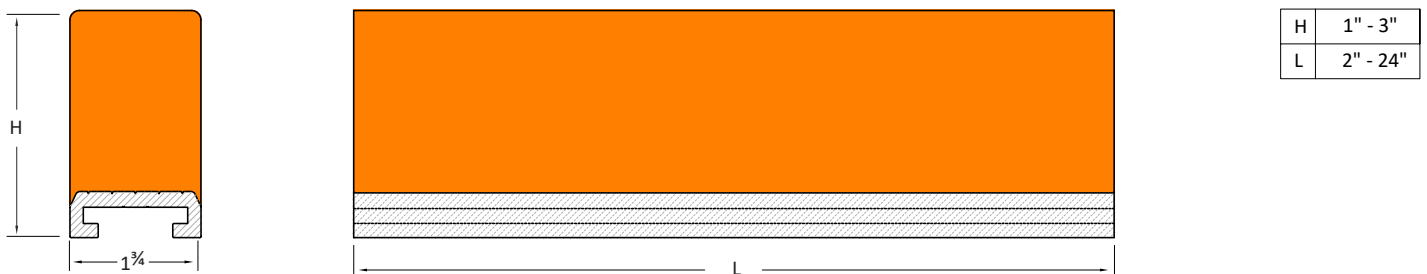

*Quick-Change 100:*

